



方全有限公司

Rapitech Enterprise Co., Ltd.

脈衝式固態雷射 Pulsed Solid-State Laser



MicroChip 532nm脈衝綠光雷射

Picosecond, High Peak Power
Green 532nm Microchip Lasers

Applications

- Material processing
 - Marking
 - Graphitization
 - Metal ablation
- Biophotonics
 - Nanosurgery
 - Protein crosslinking
- Instrumentation
 - Supercontinuum generation
 - Raman spectroscopy
 - Ranging
 - Differential absorption LIDAR
 - Distributed temperature sensing


For generating high peak power IR or green pulses of a few hundred picoseconds, microchip lasers are economical, compact, and reliable. 1064nm microjoule pulses are generated from a diode pumped passively Q-switched Nd:YAG microchip engine (SxP series); 532nm pulses are subsequently produced by harmonic conversion (SxG series); the same package is used for either wavelength. The SNP and SNG series are designed for high average power, either from pulse energies of 15>J at 1064nm and 6>J at 532nm, or from free running repetition rates up to 40kHz; the SFP and SFG series allow users to select up to three fixed frequencies, set at the factory, from 10Hz to 4kHz; the STP and STG series enable the user to trigger the laser on demand, varying the period from 100ms to 500>s, pulse to pulse.

Green 532nm SxG lasers (typical values) – Package A

Model	SNG-015E	SNG-03E
Peak Power (kW)	3.5	6
Average Power (mW)	25	25
Repetition rate (kHz)	12	7
Pulse Width (ps)	550	550
Energy/Pulse (μJ)	2	3.5

Green 532nm SxG lasers (typical values) – Package B

Model	SNG-01.5E	SNG-20F	SNG-40F	SFG-03E	STG-03E
Pulse Width (ps)	550	550	600	400	400
Energy/Pulse (μJ)	6	3.5	1.8	3.5	3.5
Peak Power (kW)	11	6	3	10	10
Repetition rate (kHz)	8	21	40	0.01-4	0.01-2
Average Power (mW)	50	70	70	≤14	≤7

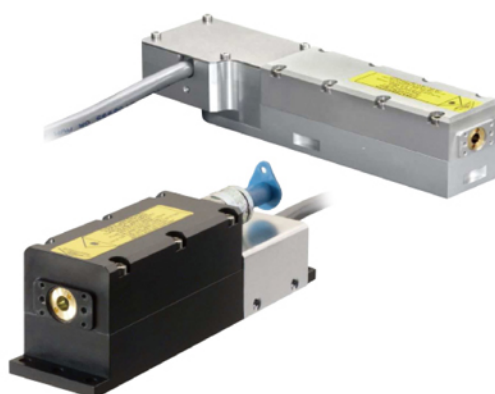

Optional features

- Connector receptacle for multimode fiber coupling
- Photodiode output for synchronization
- Manual controls for CDRH compliance

Features & benefits

Ultrashort pulses

550ps durations

High peak power

Exceeding 20kW per pulse

Variety of frequency options

Free running to 40kHz
Fixed frequency to 4kHz
Triggerable to 2kHz

Excellent beam quality

Gaussian, TEM₀₀, M²≤1.3

Efficient, air cooled

Typically dissipates <10W from laser head and consumes <20W

Extremely long life

High reliability pump diode, specialty optics, and sealed package contribute to MTTF over 14 years and expected lifetimes exceeding 10,000 hours (consult factory for details)

Licensed Technology

Exclusive license on Passively Q-switched pico-second microchip laser:
US Patent 5394413

方全有限公司

Rapitech Enterprise Co., Ltd.

244 新北市林口區仁愛路二段309號10樓

Tel : 886-2-2608-8096 (台北) / Tel : 86-21-6248-3333 (上海) / Fax : 886-2-2608-8092

E-mail : sales@rapi-tech.com.tw www.rapi-tech.com